



## Flowline Master 180° for Camera & Gimbals (FLCM-FLN-MSTR-PLA-01)



---

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Flowline Master Body Support



Tension Spring




Safety Shock Cord



Bag Packing

## Flycam Flowline Master when Placid Arm is attached to the support Bar

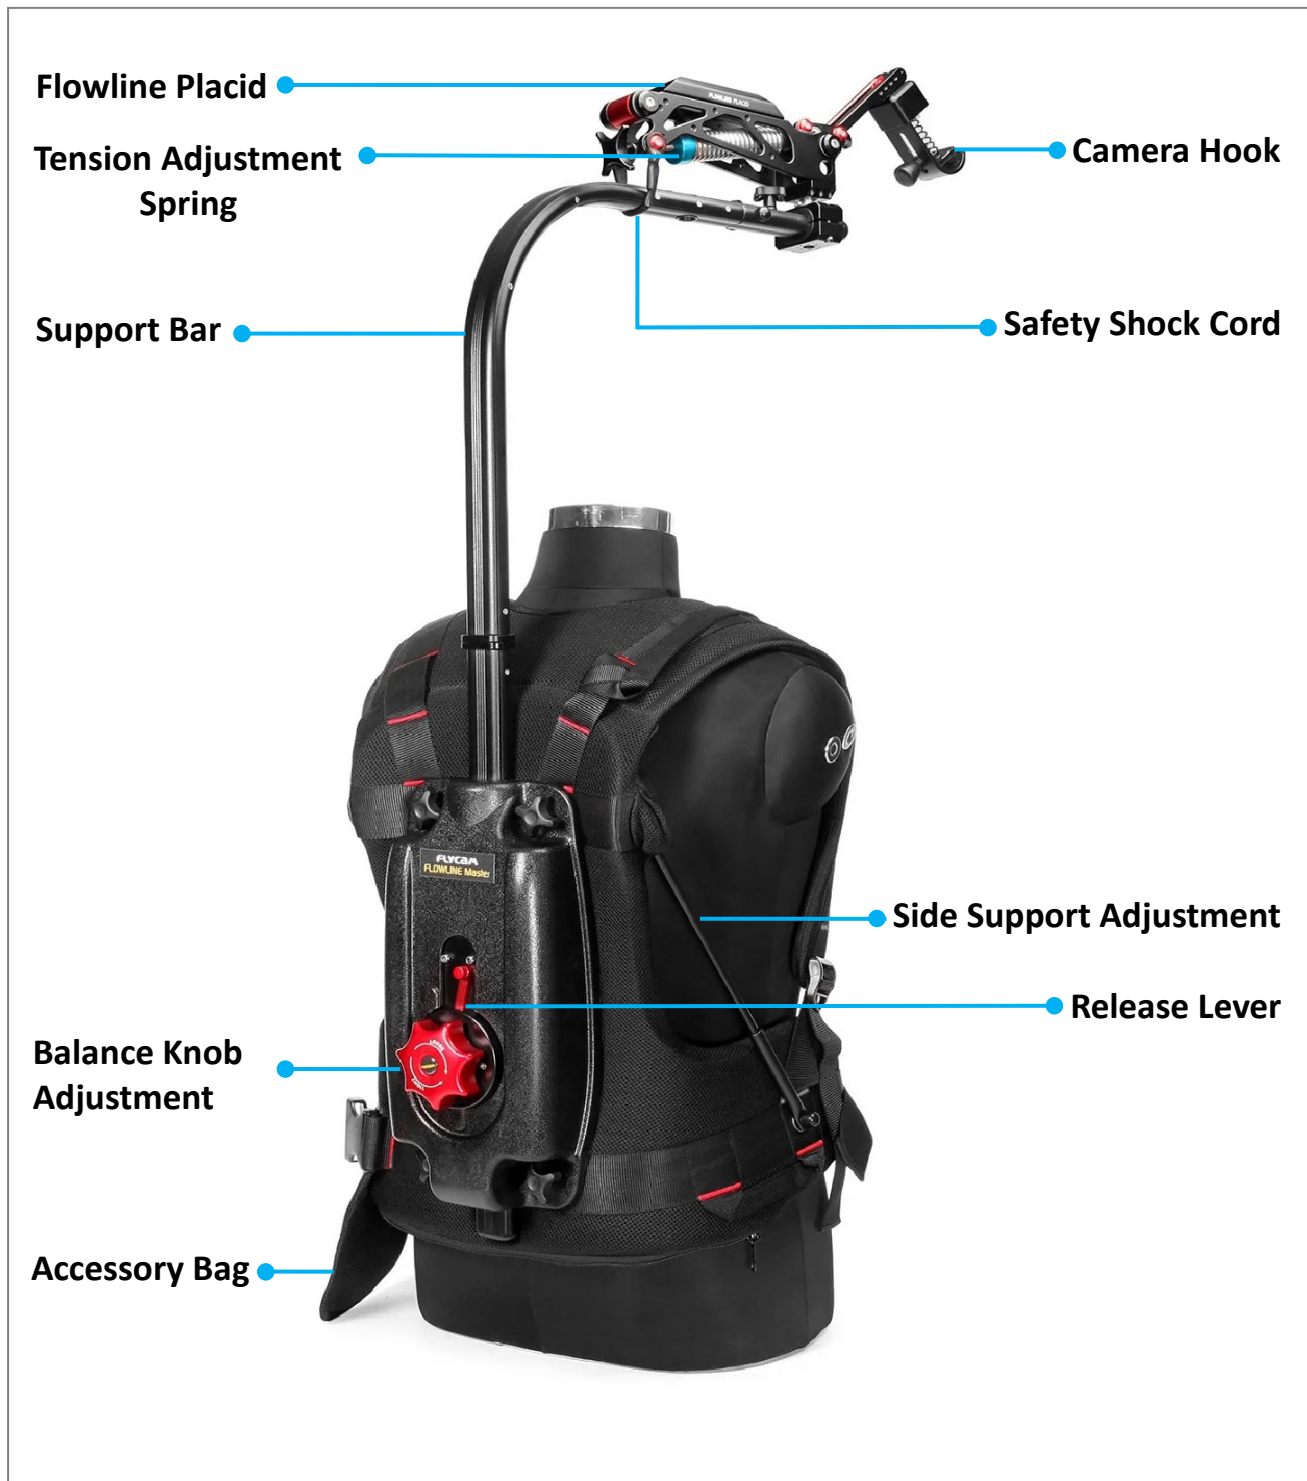

## Flycam Flowline Master Setup

**NOTE:** To ensure proper operation of your Flycam Flowline system, it is recommended that you attach the minimum required weight (5kg / 11lb) for pulling down the balancing rope.

### Support Bar Assembly

- Join support bar with body support by push-fit technique.

**NOTE:** The placid arm has a cord attached to it.



### Front Extension Section Assembly

- Remove both the knobs from the Support Bar.



- Then, attach the Front section to the support bar.



- Now, insert both the knobs and re-tighten them securely.




**NOTE:** This gives the arm stability to handle constant tension and stress placed on it.

- Your jacket is ready to use.




## Capture Every Angle

Top Bar with 180° Rotation

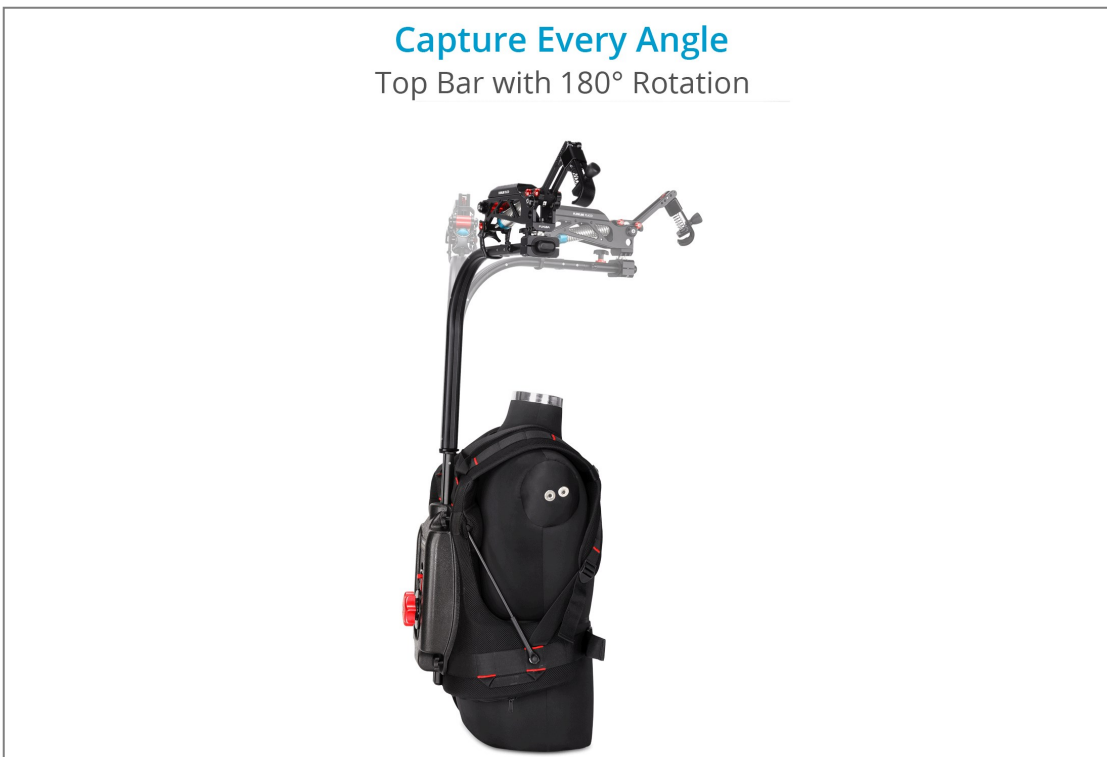

- Put on the support jacket and tighten the buckles provided at the waist and chest.

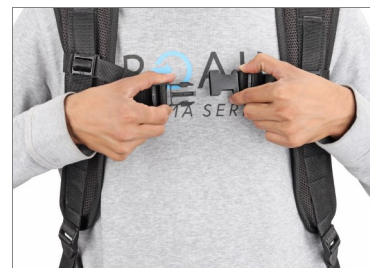

- Then, adjust the jacket as per your convenience.



## Camera Mounting

- Attach the Camera (Not Included) to the hook and tighten using the provided knob to ensure a slip-free connection.



**NOTE:** It is recommended to attach the minimum required weight 5kg / 11lb for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.



- Through the balance adjustment Knob, you can adjust the balance anti-clockwise according to the weight of your setup.

**CAUTION:** Do not release the lever without removing the setup. It may result in severe damage to the camera.



### Tension Adjustment Springs

Red Spring(115mm Long): 12-20kg / 26-44lb

Blue Spring (95mm Long): 5-12kg / 11-26lb



**NOTE:** You can balance the setup & adjust the spring tension using the adjustment knob.



## Detach the Placid Arm from the Flowline Master

- Remove the safety shock chord.
- Loosen Allen bolt of the Placid Adapter using a 4mm Allen Key (**Not Included**).



- Now remove the Placid Adapter from the Support Bar.



## Remove Camera Hook from Placid Stabilizing Arm

- Loosen the screws from camera hook using a 2.5mm Allen key (**Not Included**) and remove the screws.



- De-Attach the Camera Hook from the Cap.



- Remove the cord from the cap and pull out from the other side.



- Remove the cord into the placid adapter from the bottom.



## Attach Camera Hook to the Support Bar

- Now, insert the Cord into the Cap.



- Tie the Cord and insert into the Cord lock.



- Insert the Cord bundle into the Cap as shown in the image.



- Then, attach camera hook to the cap.
- Insert both screws of the Camera Hook attached to the Flowline Support Bar using a 2.5mm Allen key.



## Flipping Front Extension Section Mounting

- Carefully attach the front section of the Support bar.

**NOTE:** Flip the front section upside down and attach it to the Support bar.



- Now, insert both the knobs and tighten them securely.

**Feature:** Utilizes a tension adjustment lever and requires flipping the extension for Placid attachment. It has a longer, two-piece extension for added adjustability.



### Optional

**NOTE:** The knob shown in the given image would only work without the use of placid. It would work only when the camera would be assembled with the rope coming out from the support bar.



## Flycam Flowline Master when Placid Arm is not attached to the support Bar



Install Flycam Flowline Placid and change the Spring, Follow this <https://bit.ly/3Ae0t7a>

**YOUR FLYCAM FLOWLINE MASTER FOR CAMERA GIMBALS  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

**Liability:** We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

**Contact Us:** In case of any dissatisfaction, please contact us immediately. We are committed to providing the utmost support and care to ensure your satisfaction with our product.