



## Flowline-X 850N Professional Stabilizer (FLCM-FLN-850N)



---

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## ■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Bag Packing

## SPECIFICATION

|                                  |                            |
|----------------------------------|----------------------------|
| <b>Product Name</b>              | <b>Flowline-X 850N</b>     |
| Product Weight (Without Packing) | 6.50kg / 14.3lb            |
| Height Mounted                   | 112 cm (44")               |
| Load Capacity                    | 2-17kg/4.4-37.4lb          |
| Suspension line length           | 107 cm (42")               |
| Top Bar Length                   | 560mm when fully stretched |
| Folded                           | 60 cm (23.6")              |
| Vest Adjustment                  | 30" to 52"                 |

## Flycam Flowline Camera Support Setup

**NOTE:** It is recommended to attach the minimum required weight (2kg / 4.4lb) for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.

**NOTE:** Using **Placid (FLCM-FLN-PLA)** or **Edge V1 (FLCM-EDGE-V1)** with this Flowline model will impact the minimum and maximum payload capacities.

- You will receive Flycam Flowline packed in bag. Open the bag and take out the Flycam Flowline.



**NOTE:** It is recommended to attach the minimum required weight (2kg / 4.4lb) for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.

- Join section 1 of support bar to section 2 with simple push-fit technique.





- Wear support jacket and tighten the buckles provided at the waist and at the chest and adjust as per your convenience.




- By adjusting side support, you will move the weight on your hips.



- Loosen the knob of Hook and attach the camera (Not Included) to it. Tighten with provided knob to ensure slip free connection.  
**Note:** Leave a gap of approx. 2cm (1 inch) between the camera and the support arm.

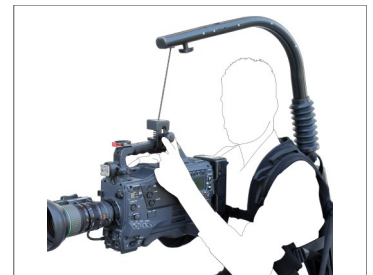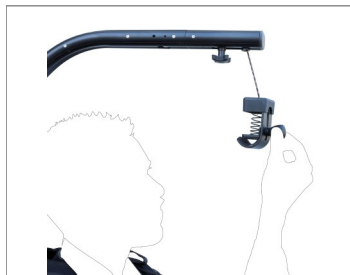

- NOTE:** Loosen the four knobs provided on the back of support jacket for height adjustment of support bar.

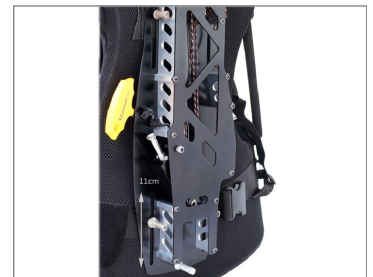

**YOUR FLYCAM FLOWLINE-X 850N PROFESSIONAL STABILIZER  
ALL DRESSED UP AND READY TO GO**



**(SHOWN WITH OPTIONAL (ACCESSORIES))**

**Warranty:** We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

**Liability:** We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

**Contact Us:** In case of any dissatisfaction, please contact us immediately. We are committed to providing the utmost support and care to ensure your satisfaction with our product.