

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Body Support



2 x Washers



2 x Velcro



2 x 4mm Knobs



2.5mm L-Type Allen Key



Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.



Flycam Flowline Starter Setup

NOTE: To ensure proper operation of your Flycam Flowline system, it is recommended that you attach the minimum required weight (3kg / 6lb) for pulling down the balancing rope.

NOTE: Using **Placid (FLCM-FLN-PLA)** or **Edge V1 (FLCM-EDGE-V1)** with this Flowline model will impact the minimum and maximum payload capacities.

Front Extension Section Assembly


- Carefully insert the front extension section on the Support bar.



- Now, insert both the side knobs and tighten them securely.





- Front section is securely attached to the support bar.

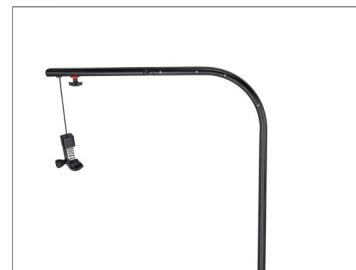

Support Bar Assembly

- Join Support bar with Body Support by push-fit technique.
- Your Jacket is ready to use.

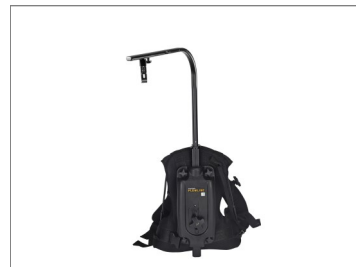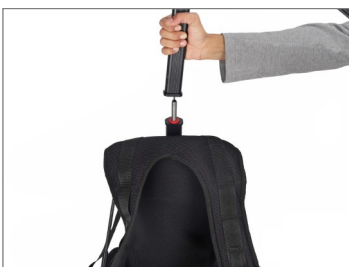

Capture Every Angle

Top Bar with 180° Rotation



Support Bar Height Adjustment


- Loosen all four Adjustment Knobs provided on the back of the Support Jacket.
- Then, move the Support Bar upwards or downwards per your requirement.
- Once the Support bar is at the desired height, re-tighten all four Adjustment Knobs to secure it.



Height Adjustable Support Bar



- Put on the Support Jacket and tighten the buckles provided at the waist and chest.

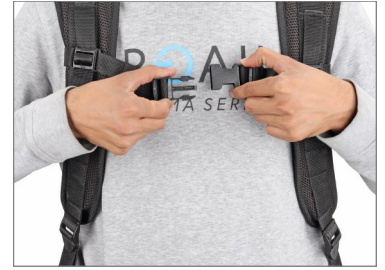

- Adjust the Jacket per your convenience.



Camera Mounting


- Attach the Camera (**Not Included**) to the hook and securely tighten the provided knob to ensure a slip-free connection.



NOTE: It is recommended to attach the minimum required weight (3kg / 6lb) for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.



- Use the lever at the back of the Body Support to release rope tension as required.
- Use the knob at the back of the Body Support to tighten the tension of the rope as required.

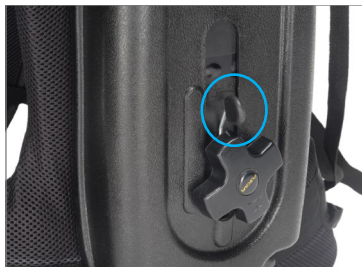

**YOUR FLYCAM FLOWLINE STARTER BODY RIG FOR CAMERA GIMBALS
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

Liability: We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

Contact Us: In case of any dissatisfaction, please contact us immediately. We are committed to providing the utmost support and care to ensure your satisfaction with our product.