

PR◀AIM

18ft Camera Crane Jib with Stand (P-18-JS)



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Section 1st



Section 2nd



Section 3rd



Section 4th



Section 5th



Jib Stand



Central Post



Weight Rod



Plastic Screw Driver



Wire Tensioner



LCD Mounting Arm



Knob



Weight Closure



Tool Pouch



Bag

INDEX

Sr. No	Particulars	Page No.
1	Jib Stand Assembly	4
2	Jib Stand Height Adjustment	4
3	Central Fork Mounting	6
4	4th Section Mounting on Central Fork	6
5	5th Section Mounting	7
6	Adjusting the Central Pool Adapter	8
7	Bush Mounting	9
8	3rd Section Mounting	9-10
9	1st Section & 2nd Section Mounting	11
10	Wire Tensioner Assembly	11
11	Weight Rod Mounting	12-13
12	LCD Mount Arm Mounting	13
13	LCD Mounting	14-15
14	Final Setup	16

Camera Crane Jib, Stand Setup

Jib Stand Assembly

- Loosen the knob on the jib stand and adjust the legs to your desired position.



- Once the legs are in place, tighten the knob to secure it.



Jib Stand Height Adjustment

- Loosen the knob to adjust the stand height.
- Raise the stand to the desired height.



- Once the stand reaches the desired height, secure it by locking the pin in place.
- Tighten the knob again to secure the stand.



- The stand's height is now securely adjusted.



Jib Stand Features:




Central Fork Mounting

- Mount the central fork on the Jib stand.
- Insert the knob, ensuring the holes are aligned.
- Tighten the knob.
- The central fork is now securely mounted on the Jib Stand.





4th Section Mounting on Central Fork

- Use a spanner to loosen the dome nut on the central fork and remove the black washers, shank, and dome nut.
- Insert the end of the 4th section into the central fork.
- Align the holes of the section with the center post, then insert the shank and reinsert the black washer and dome nut.
- Tighten the dome nut on both sides using a 13mm spanner.
- Secure the jib section with a pin, as shown in the image.
- The jib section is now securely attached to the middle section.


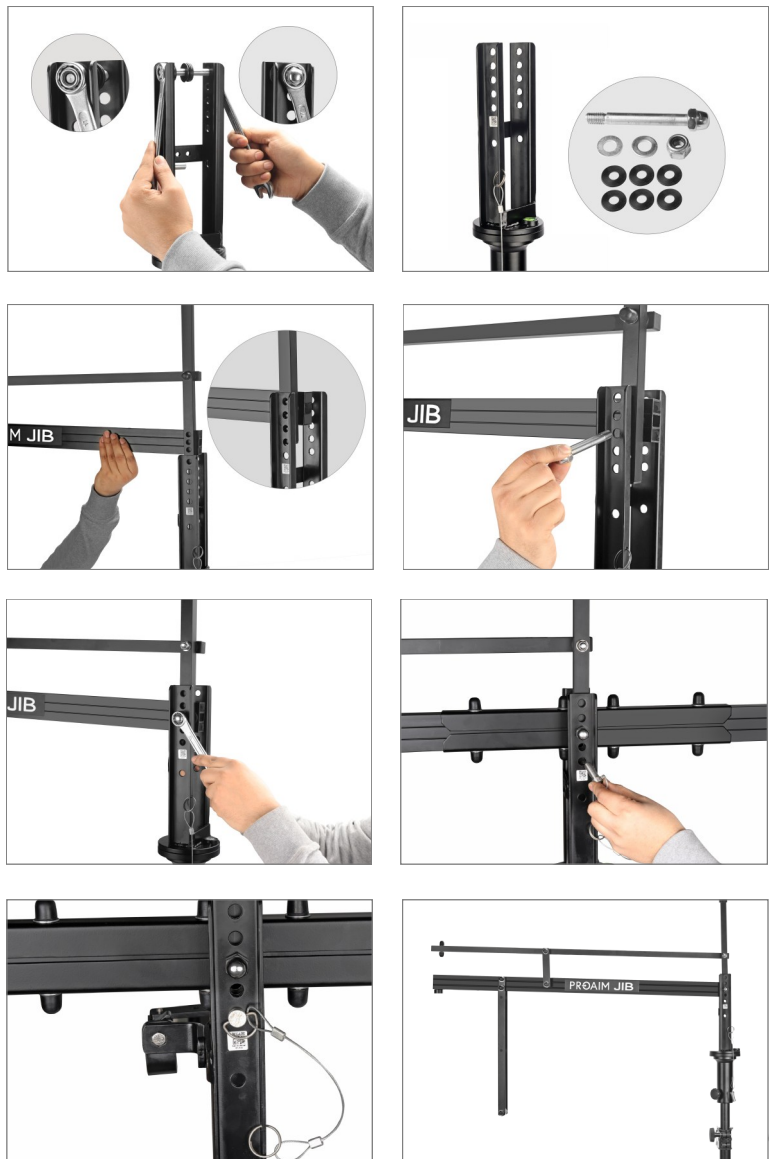


5th Section Mounting

- Remove the bolts from both the top and bottom sides of the 5th section of the jib, as shown in the image.

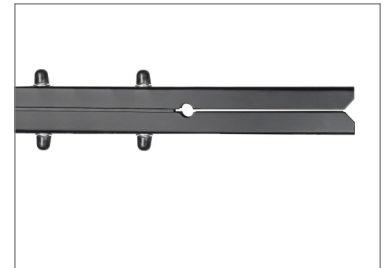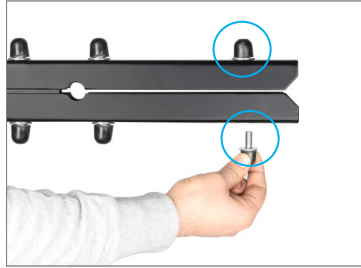

- Repeat the same for the remaining bolts of the 5th section.

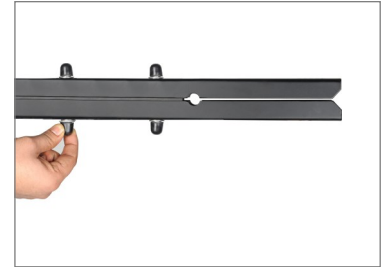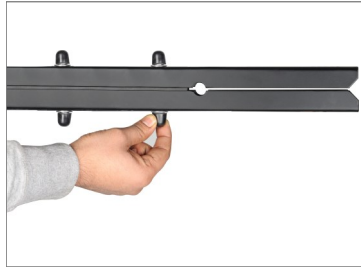


- Insert the 5th section into the end of the 4th section.




- Re-insert the bolts on both the top and bottom sides and tighten them securely.





- Tighten the remaining bolts .
- The 5th section is now securely attached to the 4th section.

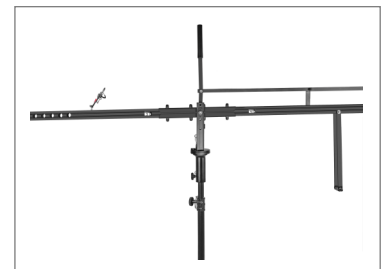

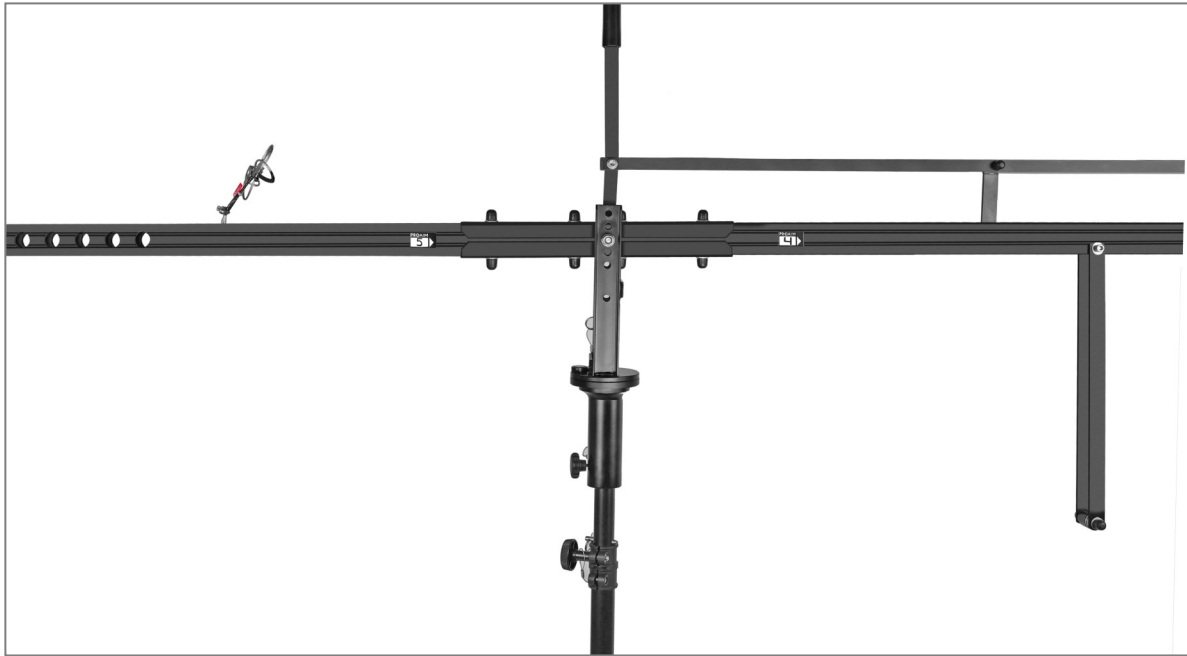

Adjusting the Central Pool Adapter

- Remove the bolt from the 4th section near the central pool adapter.
- Rotate the central pool adapter to adjust its position.
- Once the position is set, insert the bolt to secure the central pool adapter, as shown in the image.
- Tighten the bolt using a 13mm spanner and a 6mm Allen key.
- After tightening the bolts, reattach the cap.

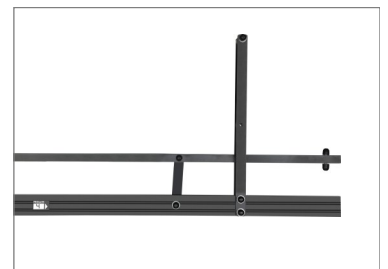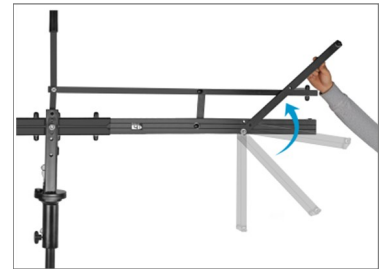


Bush Mounting

- Remove the bolt, washer, nut, and rubber cap from the bush.
- Insert the bush into the central Spool adapter, then insert the bolt with the rubber cap and washer.
- Attach the nut with the rubber cap on the other side.
- Tighten the bolt using a 6mm Allen key and a 13mm spanner.




3rd Section Mounting



- Remove the bolts from the 4th Section of the jib.
- Loosen the nut and remove the long bolt from the front end of the 3rd Section of the jib.

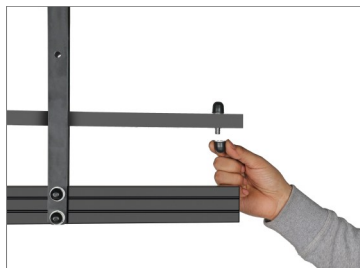

- Remove caps from all the bolts of the 3rd Section.
- Loosen the remaining bolts using a 6mm Allen key and a 13mm spanner.

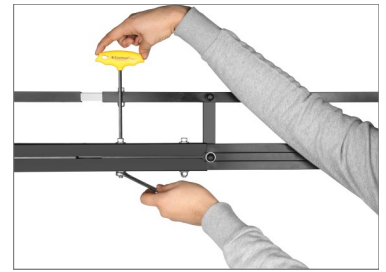

- Insert the 3rd Section into the front end of the 4th Section.

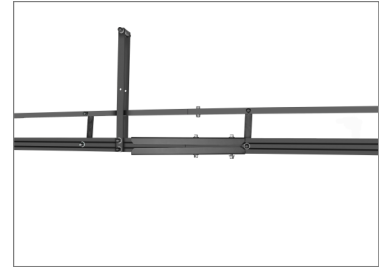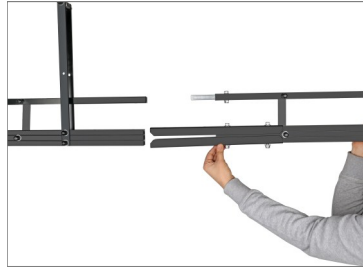


- Insert the long bolt and nut, ensuring the holes are aligned.



- Insert the bolt and nut into the top section of the jib, ensuring the holes are aligned.





5th Section, 4th Section & 3rd Section

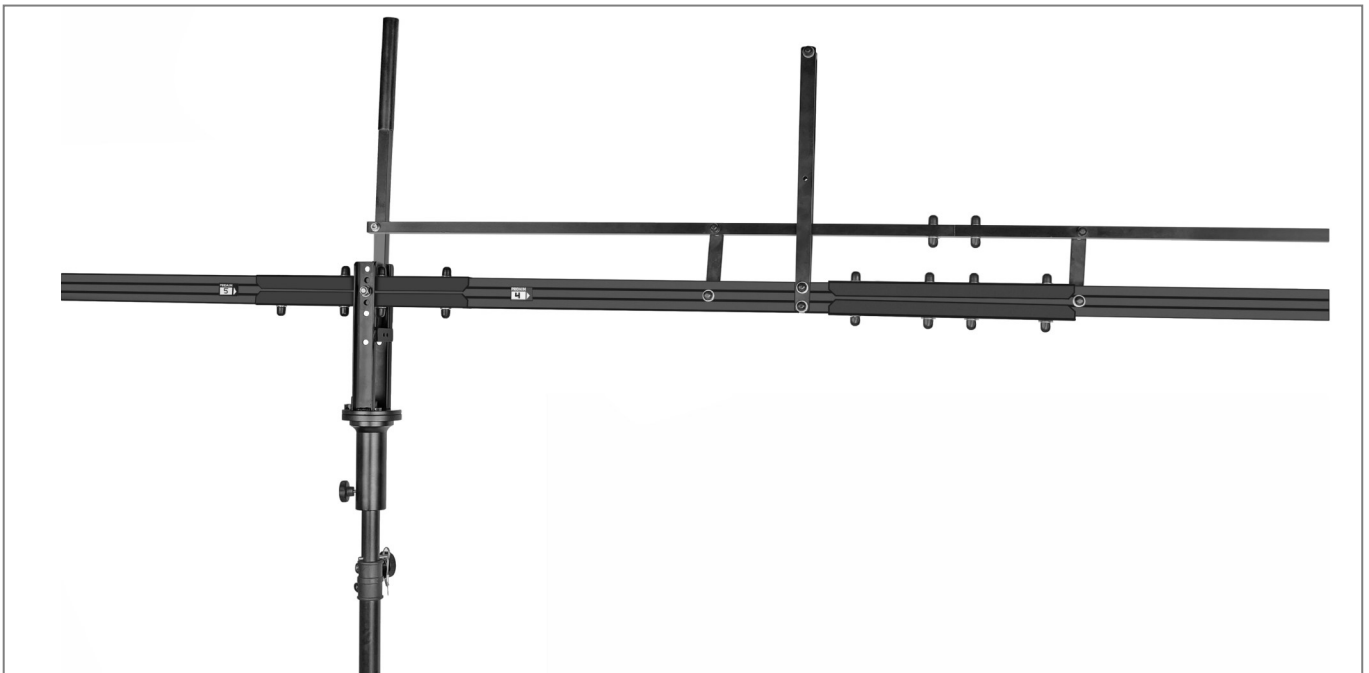




1st Section and 2nd Section Mounting

- Repeat the same steps to insert the 2nd section into the 3rd section, and the 1st section into the 2nd section.
- The Jib sections are now securely attached.

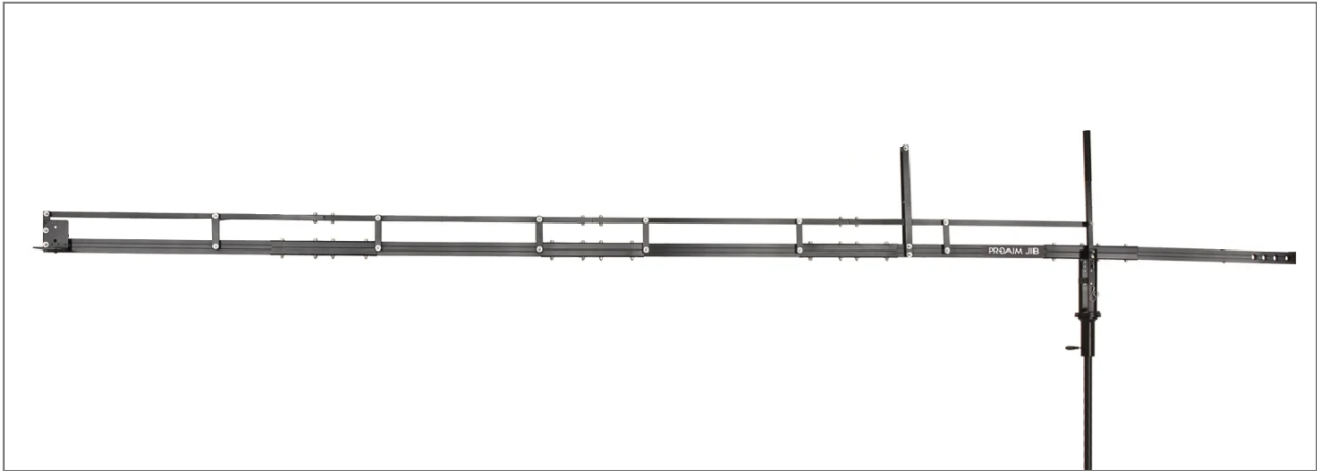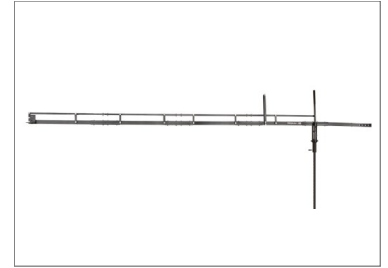

Wire Tensioner Assembly

- Connect the wire tensioner (attached to the 1st section) to the wire (attached to the 5th section).
- Mount the wire onto the central pool adapter.
- Rotate the mid-section handle to tighten the cable, applying the required amount of tension to the system.

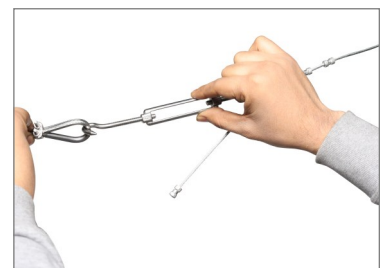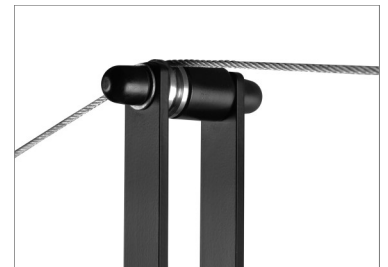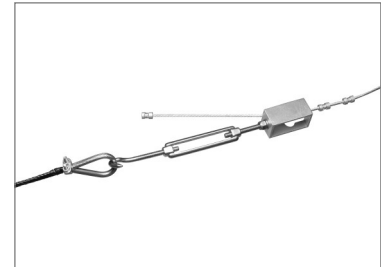


Stability in Any Environment

Wire System adds Rigidity
& Reduces Vibration during Movement




Weight Rod Mounting

- Insert the weight rod into the 5th Section and add the weights (Not included) onto it.

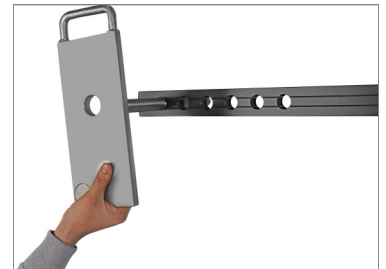

- Secure the weights by attaching the weight Closures.
- Add weights to the other side of the weight rod using the same process, based on your preference.

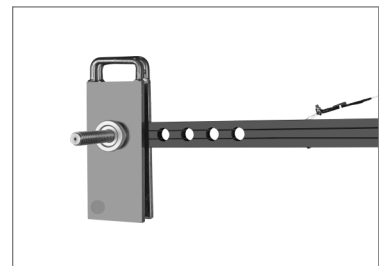

NOTE: The arm length can be adjusted to 18, 14, or 12 feet by easily removing a jib section, providing versatility for different shooting scenarios.



LCD Mount Arm Mounting

- Loosen the knob on the LCD mounting arm.
- Attach the mounting arm to the central post.



- Insert the washer and knob.
- Tighten the knob securely to hold it in place.



- The LCD mounting arm is now securely attached.



LCD Mounting

- Mount the LCD (Not included) and tighten the knob securely.
- The LCD is now securely mounted.



- Install the camera bolt (Not Included) into the LCD Monitor Arm.



- Attach the monitor to the LCD Monitor Arm and tighten the camera bolt using a plastic screwdriver.



NOTE: The jib is compatible with 3-axis gimbals, pan-tilt heads, and fluid heads. Its universal front mounting allows for easy attachment of pan-tilt heads and 3-axis gimbal stabilizers. The camera mount tilt control provides both auto tilt and manual tilt modes, operated via a control handle.

Professional & Versatile Design

Adapts 3-Axis Gimbals, Pan Tilts & Fluid Heads



**YOUR PROAIM 18FT CAMERA CRANE JIB WITH STAND
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please contact us immediately and we promise our utmost support and care until you use our product.