

PROAIM

Atlas V2 Video Production Camera Cart (CT-ATLS-30)



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Top Shelf



2 x Pneumatic Wheels (with Brake)




2 x Pneumatic Wheels (without Brake)



Bottom Shelf



4 x Rod Adapter

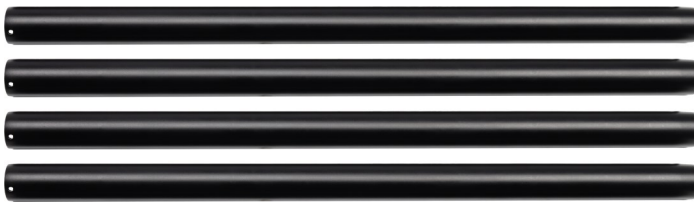

4 x Rods



2 x Cross Bar



Carrying handle



2 x Side Handle



16x Allen Bolts
(Size: 5 x 12mm)



2 x Allen Bolts
(Size: 8 x 20mm)



2 x T-Type Allen Key
(Size: 4mm & 5mm)



4 x Washer
(Size: 8 x 16 x 2mm)



4 x CSK Bolts
(Size: 6 x 20mm)



2 x L-Type Allen key
(Size: 6mm & 4mm)



2 x Allen Bolts
(Size: 8 x 25mm)

Atlas Camera Cart Setup

- First, remove the top shelf as shown in the image.



- Then, carefully separate each foam layer, one at a time.



Pneumatic Wheels Assembly

- Loosen the locking lever on the pneumatic wheel (with brake), as shown in the image.
- Next, insert the wheel (with brake) into the dovetail plate on the bottom shelf.



- Secure it firmly using the locking lever. Repeat the process to install the second wheel (with brake).
- If the wheel still slides after tightening the locking lever, use a 4mm Allen key to further tighten the bolt.



- Loosen the locking lever on the pneumatic wheel (without brake), as shown in the image.
- Next, insert the wheel (without brake) into the dovetail plate on the bottom shelf.



- Secure it firmly using the locking lever. Repeat to install the second wheel (without brake).
- All wheels are now attached, as shown in the image.



Assembly of Rods

- Loosen the knob on the locking clamp to open it.
- Next, insert the rod into the clamp and position it properly.
- Once aligned, close the clamp and tighten the knob to securely lock the rod in place. Repeat this process to install the remaining rods, as shown in the image.
- Ensure all rods are properly installed, as shown in the image.



Carrying Handle Assembly

- Using a 4mm Allen key, remove all the bolts from the carrying handle.
- Position the carrying handle at the center of the side of the bottom shelf and secure the handle by tightening the bolts with the 4mm Allen key.



- Repeat the process to fasten all remaining bolts, ensuring the handle is firmly attached.



Assembly of Rod Adapters

- First, unlock the locking lever on the rod adapter.



- Attach the rod adapter to the top shelf.
- Secure the adapter by tightening the bolts with a 4mm Allen key, and repeat the same for all the remaining adapters.



Top shelf Assembly

Note: Two people are required to safely position the top shelf onto the rods.

- Carefully place the top shelf onto the rods, then close the lever locks on all rod adapters to secure it in place.



Handle Assembly

- Open the handle clamp and attach the handle to the rod. Adjust its position as needed, as shown in the image.



- Lock the clamp to secure the handle in place.



- Follow the same steps to position and secure the second handle. Both handles are now attached to the cart.



Crossbar Assembly

- First, open the clamp, loosening its knob, as shown in the image.



- Attach the Crossbar to the rods and tighten the knobs to secure it.



- Repeat the same process to attach the second crossbar.



- Your cart is now ready to use.



**YOUR PROAIM ATLAS V2 VIDEO PRODUCTION CAMERA CART
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

Liability: We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

Contact Us: In case of any dissatisfaction, please contact us immediately. We are committed to providing the utmost support and care to ensure your satisfaction with our product.