



Ballpro Camera Suction Car Mount w Vibration Isolator(CM-BLPR-01)



All rights reserved.


No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Suction Car Mount

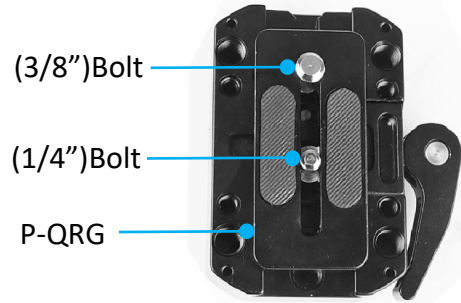


DJI -QR Plate



4 x Dust Covers



4 x O-Ring



2 x CSK Bolts
(Size: 1/4"-1-1/4")



Belt



Allen Bolt
(Size: 3 x 6")



2 x Allen Keys
(Size: 4mm, 2.5mm)



Foam With Bag Packing

■ Ballpro Camera Suction Car Mount Setup

- Remove all the dust cover of Suction Car Mount as shown in the image.



Mount Suction Car Mount onto the car

- Place your first suction cup in the selected position from where you want to shoot.



- Press down the suction cup and keep pushing the pump to firmly fix it on the surface.
- Repeat this process for all the suction cups.



- Suction Car Mount is now properly placed on the car.

CAUTION: Recheck the Pump every 90 minutes. If the red line is visible, Re-pump the cup without losing the remaining vacuum till the Red Line disappears.



- Secure the movement of the ball joint with the help of the Ratchet knob of the Telescopic legs.



NOTE: Two Ratchet knobs are provided in Suction Car Mount, with the help of the bottom knob, you can change the ball joint movement of the telescopic legs.




DJI-QR Plate Mounting


- Place the DJI-QR Plate on the Suction Car Mount.



- Then insert (1/4"-20 & 1-1/4") Allen CSK bolts and tighten with the help of 4mm Allen key.

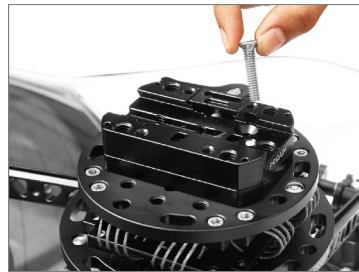

- DJI-QR Plate is properly attached on the Suction Car Mount.

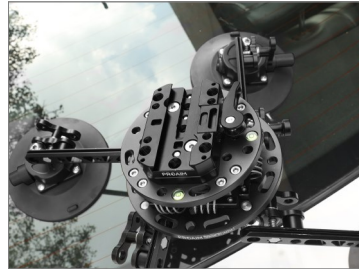

P-QRG Plate with Ronin Mounting


- Then attach the (P-QRG) plate with Ronin Gimble (**Not-Included**) and tighten it properly with the help of a Screw Driver (**Not-Included**).



- Then attach the gimbal by sliding it from the DJI-QR plate of the suction car mount.



- Tighten the DJI-QR plate with the help of the provided knob.

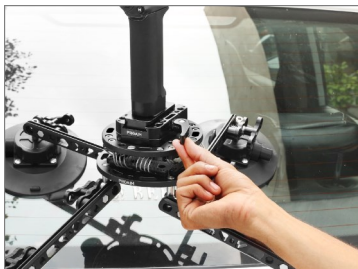

- Your Gimbal is properly mounted on the suction car mount.



Camera Mounting

- Attach the camera (**Not-Included**) with Ronin Gimbal (**Not-Included**), as shown in the image.
- Now your setup is ready to use.



**YOUR PROAIM BALLPRO CAMERA SUCTION CAR MOUNT
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.