



Mitchell Vibration Isolator for Gimbals (VB-MTCL)



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Proaim Mitchell Vibration Isolator
for Camera Gimbals



3/8" × 1" Half-thread Allen Bolt



Castle Ring



2 x Washer (Size: - 2 x 10 x 20mm)




1 x L-Type (Size:- 4mm)




1 x L-Type (Size:- 5/16")

Note: If you have purchased (VB-MTCL-00~), you will receive the following:

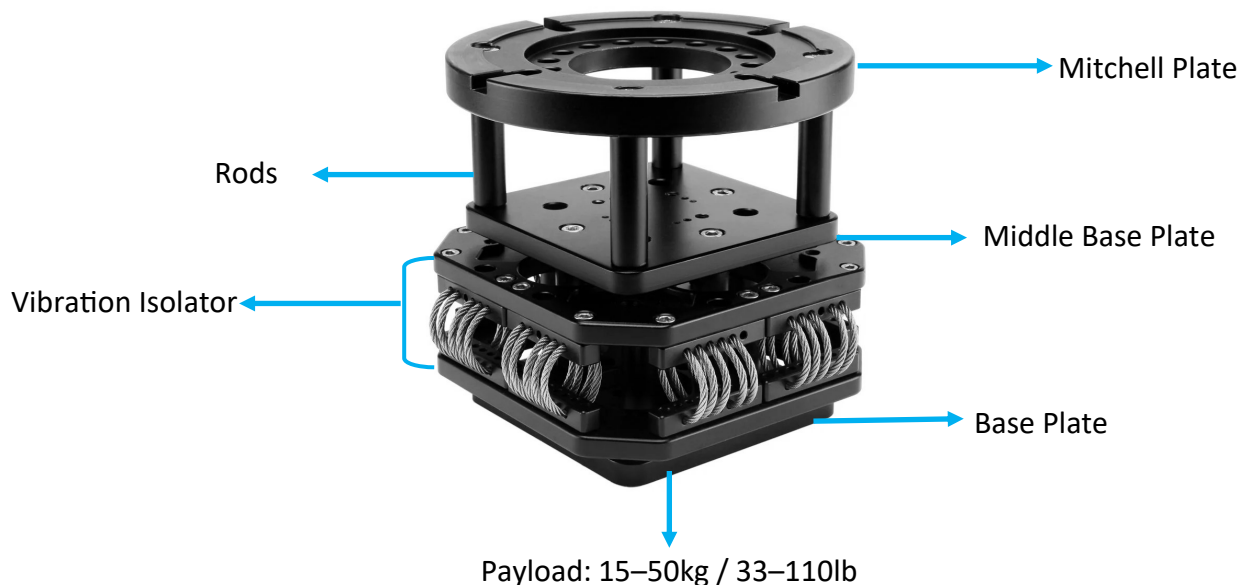

Note: If you have purchased (VB-MTCL-02~), you will receive the following:

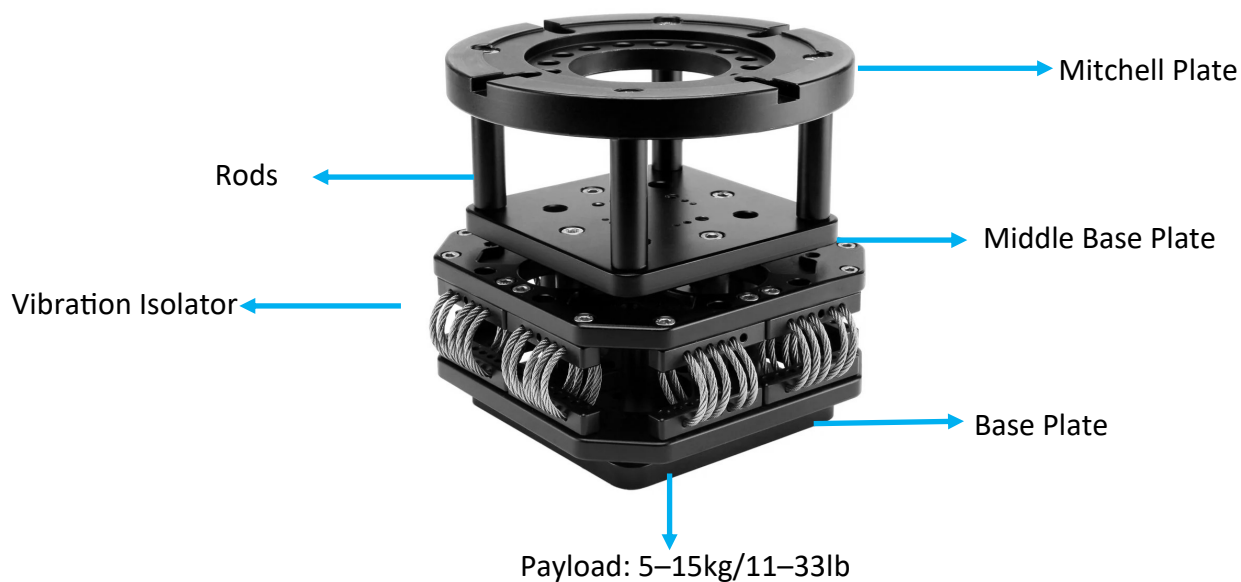

INDEX

Sr. No	Particulars	Page No.
1	Mitchell Vibration Isolator Setup	4-5
2	DJI Quick Release (DJI-QR) Setup	5-8
3	Single Spring Set Setup	8-9
4	Fully Assembled Overview (Optional Accessories Shown)	9


Vibration Isolator Setup

Mitchell Vibration Isolator Setup



- Attach the Mitchell Vibration Isolator to the VI-ARW-530 arm (**Not Included**) and insert the Allen Bolt.




- Tighten the Allen bolt using a 5/16" Allen key and insert the castle ring.

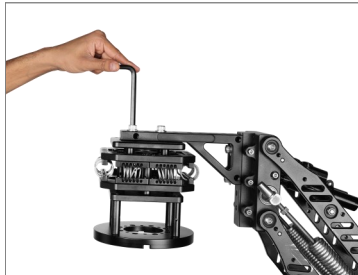


- Secure the setup by tightening the castle ring with the RN-188-00 plate (**Not Included**).

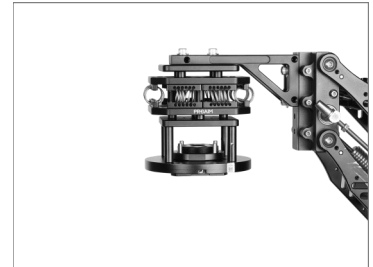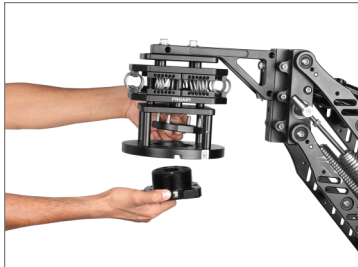

- Loosen the lock on the RN-188-00 plate using a 3 mm Allen key.

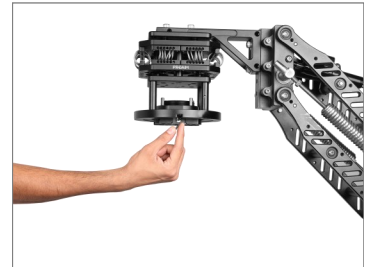

- Attach the gimbal (**Not Included**) to the RN-188-00 plate.

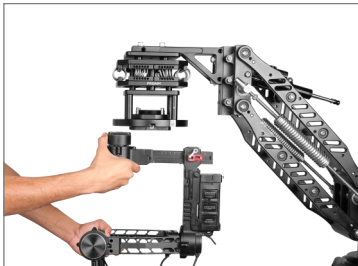

- Tighten the RN-188-00 lock using a 3mm Allen key.



- Mount the camera (Not Included) to the gimbal and tighten the lever lock to secure it.



- The setup is now ready for use.



DJI-QR Setup

- Turn the isolator upside down and loosen the bolts to detach the isolator from the base plate.



- Remove the base plate as shown in the image.



- Loosen the bolts and remove the isolator plate.



- Using a 3mm Allen key, remove any remaining bolts.



- Detach the middle base plate from the Mitchell plate (Use only the middle base plate.)



- Attach the DJI Quick Release Plate (Not Included) to the middle base plate.



- Insert the bolt and tighten it using a 4mm Allen key.



- Attach the middle base plate to the isolator plate and insert the bolt as shown.



- Tighten the bolts using a 5mm Allen key.





- Reattach the base plate to the isolator plate, and insert the bolt.





- Tighten the Bolt with help of 5mm Allen key




- Attach the isolator to the arm and tighten the bolt using a 5/16" Allen key.

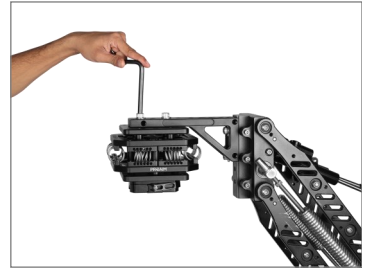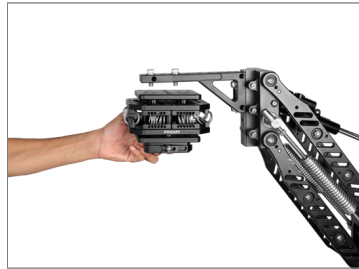

- Unlock the lever on the DJI plate.

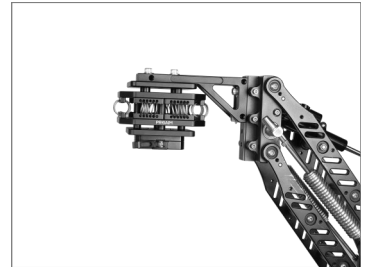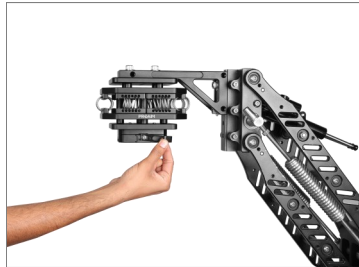


- Slide the gimbal onto the vibration isolator and lock the Quick Release Plate.

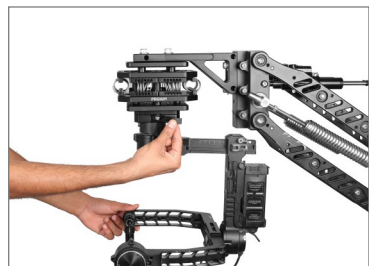

- Attach the Camera (Not Included) to the gimbal .



- Your DJI Quick Release setup is now ready for use

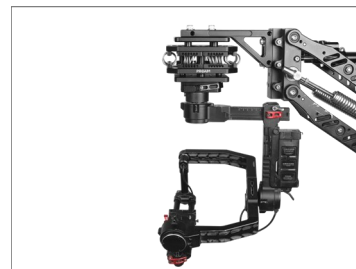

Single Spring Set Setup

NOTE: The vibration isolator can also be customized with a single-spring configuration for lightweight setups (15–30 kg / 33–66 lb)

- Loosen and remove the bolts from the top of the vibration isolator plate.



- Loosen and remove the bolts from the bottom of the vibration isolator plate.



- Adjust the wire set in the center of the vibration isolator. Tighten all Allen bolts securely to fix the spring set.



- The Vibration Isolator setup is now ready for use.



**YOUR PROAIM MITCHELL VIBRATION ISOLATOR FOR GIMBALS
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

Liability: We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.