



Multi Monitor Mounting System for Video Camera (P-MLMT-M2)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



2 x Base Rod Mount



2 x Rod Clamp



2 x Rod



2 x Tube Rail



4 x Rod Clamp
Rail Holder



2 x Tube Rail Clamp
with 5/8 Baby Pin



1 x L-Type Allen
Key (Size: 4mm)



Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.


INDEX

Sr. No	Particulars	Page No.
1	Rod Assembly	3
2	Mounting the Rod Clamp	3
3	Attaching the Rail Holders	3-4
4	Mounting the Tube Rail	4
5	Installing the Tube Rail Clamp	4-5
6	Drill Mounting to the Cart	5
7	5/8" Baby Pin Adjustment	6
8	Mounting the Multi-Monitor System to Cart	6
9	Multi Monitor Mounting System Setup	7
10	Final Setup	8

Multi Monitor Mounting System Setup

Rod Assembly

- Loosen the knob on the Base Rod Mount and insert the Rod into the mount
- Once inserted properly, tighten the knob securely as shown in the image.

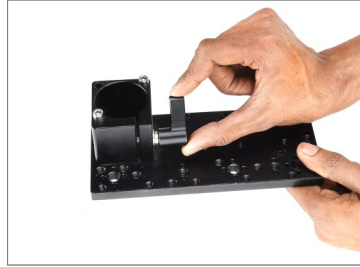

Mounting the Rod Clamp

- Loosen the knob on the Rod Clamp and mount it onto the Rod
- After positioning the clamp correctly, tighten the knob securely.



Attaching the Rail Holders

- Loosen the Rail Holder knob and mount it onto the Rod



- Tighten the knob securely after positioning the Rail Holder. Repeat the same process to mount the second Rail Holder.



- Repeat the complete assembly process on the opposite side as well.



Mounting the Tube Rail

- Using the 4mm Allen Key, loosen all bolts on the Rail Holders evenly to create space for the Tube Rail.



- Insert the Tube Rail properly into the Rod Clamp Rail Holders.



- Once inserted, tighten all bolts evenly using the 4mm Allen Key
- Repeat the same process for the second Tube Rail.




Installing the Tube Rail Clamp

- Loosen the knob on the Tube Rail Clamp.



- Mount the Tube Rail Clamp onto the Tube Rail.

NOTE: The clamp features a standard 5/8" BabyPin, offering secure mounting for your monitor system. Tighten the knob securely.

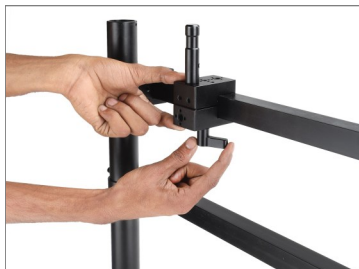

- Repeat the same process for the second Tube Rail Clamp

NOTE: The cheese plates with scaffold clamps are designed to support accessory mounting and also provide the option to permanently drill the system onto your cart deck.



■ Drill Mounting to the Cart

- Place the base rod mount on the cart and mark the drilling positions.



- Remove the mount and drill at the marked points. Secure the mount using bolts.



- Tighten all bolts properly using an Allen Key.



5/8" Baby Pin Adjustment

- Loosen and remove the 5/8" Baby Pin.



- Insert the Baby Pin into the alternate mounting thread as required.

NOTE: Adjust the Baby Pin position according to your setup requirements.



Mounting the Multi-Monitor System to Cart

- Loosen the Rod Clamp knob and rotate the clamp to the desired position. Tighten the knob securely afterward.

NOTE: The Rod Clamp supports 360° pan adjustment and can be easily positioned according to the width of your cart.



- Loosen the Ratchet Knob and attach the Rod Clamp to the cart **(Not Included)**.



- Tighten the Ratchet Knob securely. Repeat the same process for the second Rod Clamp



NOTE: Multiple sturdy knobs ensure secure monitor attachment and smooth adjustments.



Multi Monitor Mounting System Setup

- Loosen the knob of the Monitor System (Not Included) and mount it onto the 5/8" Baby Pin.



- After mounting, tighten the knob securely.

NOTE: For Proaim Sound Chief Cart, Atlas, and Victor Cart Series, the mounting system attaches using clamps.

- For the Proaim Bowado Cart, drilling is required for installation.



NOTE: You can position the monitor system on the left, right, or center according to your requirements.

The system supports mounting at least two monitors while maintaining a sleek and professional setup.



YOUR PROAIM MULTI MONITOR MOUNTING SYSTEM ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.