

PROAIM Multi-Monitor VESA Mount System (P-MLMT-01~)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



2 x Poles



2 x VESA Mounts



2 x Cross Tubes



2 x 10" Extension Cross Tubes



2 x Cross Bars



2 x Clamps



2 x T-Type Allen Keys
(Sizes: 3x16" & 4mm)



Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

INDEX

Sr. No	Particulars	Page No.
1	Multi-Monitor VESA Mount Setup	3
2	Clamp Assembly	3
3	Pole Mounting	3-4
4	Cross Tube Mounting	4-5
5	Extension Cross Tubes	5
5	Cross Bar Mounting	5-7
6	VESA Mount Installation	7-8
7	LCD Monitor Mounting	8-9
8	Sound Chief Cart (Not Included) Setup	9
9	Method 1: VESA Mounting with Clamp	9
10	Clamp Mounting	9
11	VESA Mount Installation	10
12	Method 2: VESA Mounting Without Clamp	10
13	VESA Mount Installation	10
14	Cross Tube Mounting on Sound Chief Cart	11
15	Cross Bar Mounting on Sound Chief Cart	11-12
16	Assembly of VESA Mount	12-13
17	LCD Monitor Mounting on Sound Chief Cart	14
18	Final Setup	15

Multi-Monitor VESA Mount Setup

Clamp Assembly

- Loosen and open the ratchet knob of the clamp.
- Align and attach the clamp to the rod on the cart (**Not Included**), then tighten it using the ratchet knob.
- Repeat the process for the second clamp as shown in the image.



Pole Mounting

- Loosen the clamp knob and insert the pole through the clamp hole.
- Tighten the knob to secure the pole.



- Repeat the same process for the second pole.



- The pole offers five adjustable height positions, allowing you to set the height according to your setup requirements.



- Images is Ready.



- Loosen all the knobs attached to the pole and remove the rod end cap.



- Similarly, remove the end caps from both rods.



Cross Tube Mounting

- Insert the cross tube by aligning it with the hole on the pole.



- Repeat for the second cross tube.




Extension Cross Tubes

Note: Use the Extension Cross Tubes when installing on a 48" cart.

- Insert the Extension Cross Tubes into the Cross Tubes on one side.



- Repeat the same process for the other side.

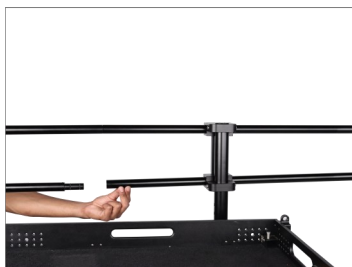

- The setup is now ready.




Cross Bar Mounting

- Loosen both the knobs on the cross bar.




- Align the holes of the cross bar with the cross tubes and slide them in.

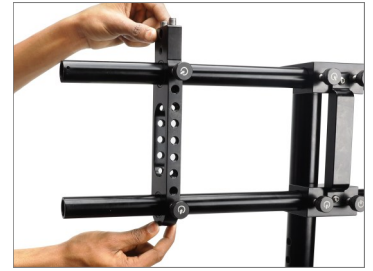


- Tighten the knobs securely, then repeat for the second cross bar.




- Using the 4mm Allen key, tighten the bolt on the backside of each cross bar.

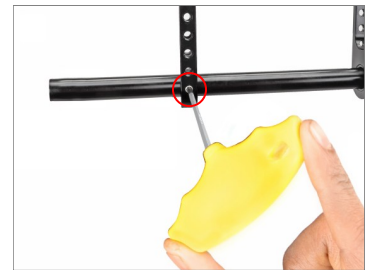



- Insert both cross tubes evenly into the second pole.

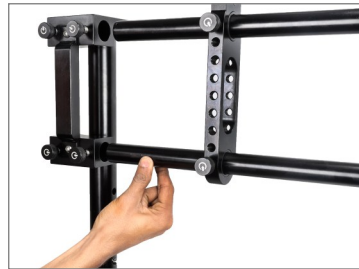

- Tighten pole knobs to secure the assembly.

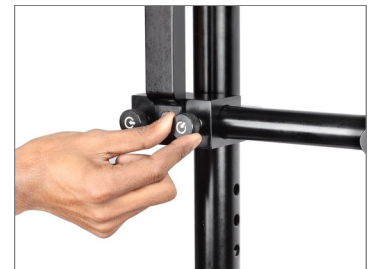

- Insert the rod end cap.

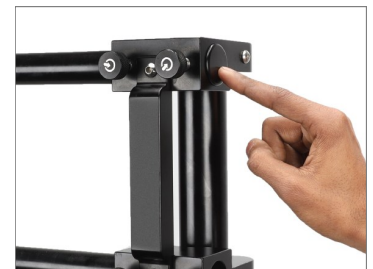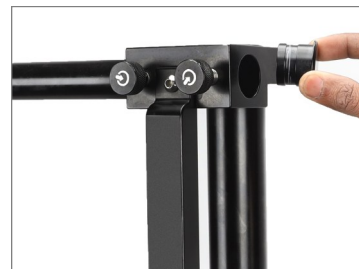


- Finally, secure them using the provided knob on the pole.



VESA Mount Installation

- Loosen the knob of the VESA Mount, as shown in the image.

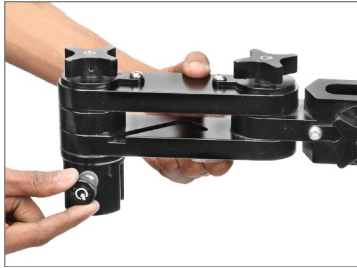

- Using the 4mm Allen key, loosen and remove the bolt located on the side of the VESA Mount.



- Mount the Cross Bar onto the VESA Mount.



- Align the threaded holes of the Cross Bar and VESA Mount, insert the bolt, and tighten it securely using the 4mm Allen key.



- Re-tighten the VESA Mount knob to firmly secure it to the Cross Bar.




- Repeat the same procedure to attach the second VESA Mount.



Note: To change the viewing orientation, loosen the VESA Mount knob and rotate the mount 180°.



Note: Adjust the VESA Mount position as needed for your preferred setup.

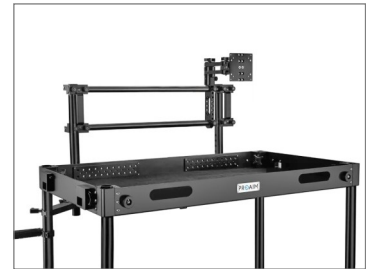

- Remove the knobs on both sides of the VESA Mount and loosen the grub screw with a 4mm Allen Key.



- Carefully detach the VESA Mount.



LCD Monitor Mounting

- Align the VESA Mount with the threaded holes on the back of the LCD monitor (**Not Included**), as shown in the image.



- Insert the bolts and tighten them securely using the 3mm (**Not Included**) Allen key.



- Mount the LCD monitor onto the VESA bracket and align it properly. Then, insert the bolts and tighten them securely using the 3mm (**Not Included**) Allen key .



- Your Multi-Monitor VESA Mount System is now fully assembled and ready to use allowing you to mount two monitors on your cart.



■ Sound Chief Cart (**Not Included**) Setup

Method 1: VESA Mounting with Clamp

Clamp Mounting

- Loosen and open the ratchet knob of the clamp.




- Align the clamp with the rod and attach it securely by tightening the ratchet knob.



VESA Mount Installation

- Insert the VESA Mount into the clamp and tighten the knob to secure it.

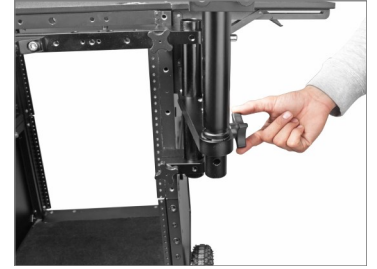


- Repeat the same process for the second VESA Mount.



Method 2: VESA Mounting Without Clamp


VESA Mount Installation

- Insert the VESA Mount directly onto the Sound Chief Cart rod.
- Loosen the top and bottom clamp knobs, slide the VESA Mount downward into position, and then tighten both knobs securely.

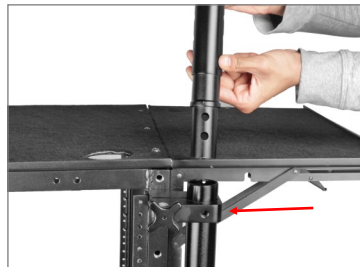

Note: Position the VESA Mount in the center of the joint point clamp, then tighten the knob.

- Repeat the same process to install the second VESA Mount.

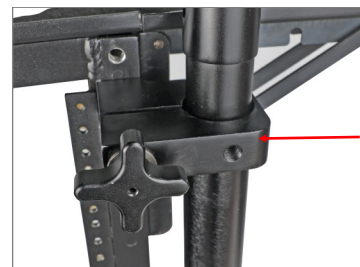

Cross Tube Mounting on Sound Chief Cart

- Insert the cross tube by aligning it with the hole on the pole, as shown in the image.



- Similarly, insert the second cross tube.




Cross Bar Mounting on Sound Chief Cart

- Loosen both knobs of the cross bar, as shown in the image.



- Align the holes of the crossbar with the cross tubes, then slide the crossbar into position.

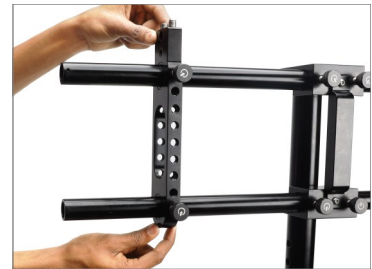


- Once inserted, securely re-tighten both knobs. Repeat the same process for the second crossbar.



- Using a 4mm Allen key, properly tighten and secure the bolt on the backside of the crossbar.



- Now, insert both cross tubes equally into the second pole, as shown in the image.

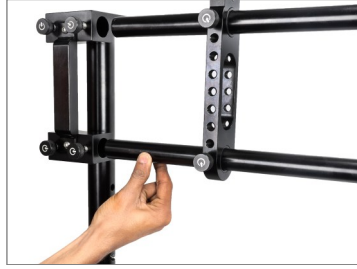

- Tighten the knobs on the pole to secure the assembly firmly.



- Insert the rod end caps to lock the cross tubes in place, as shown in the image.




- Finally, secure the setup using the provided pol knob.



Assembly of VESA Mount



- Loosen the VESA Mount knob.

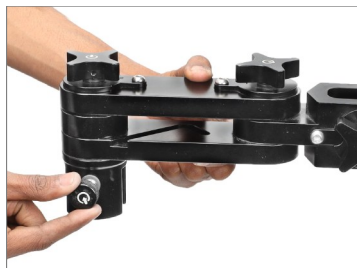



- Loosen and remove the side bolt from the VESA Mount using the 4mm Allen key.



- Mount the cross bar onto the VESA Mount.

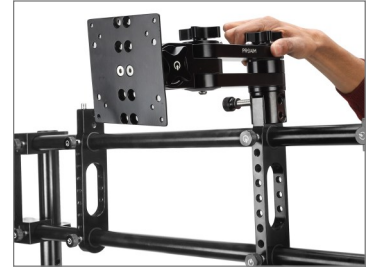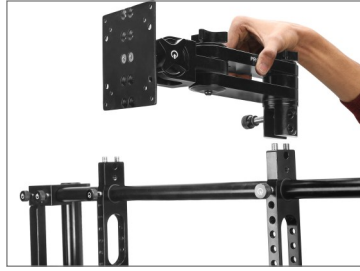



- Align the thread holes of the Cross Bar and VESA Mount, then insert the bolt and securely tighten it using the 4mm Allen key.

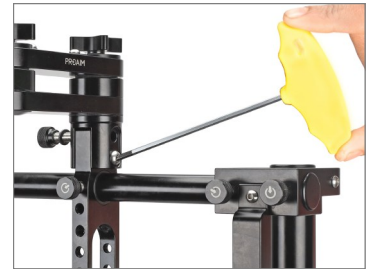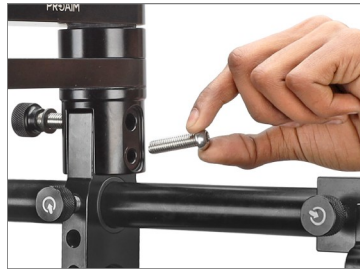

- Re-tighten the VESA Mount knob to firmly secure the assembly.



- Repeat the same procedure to attach the second VESA Mount.

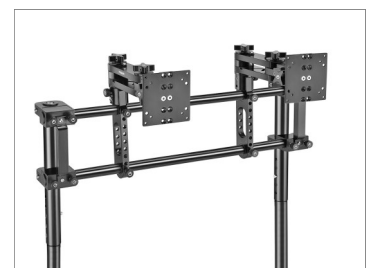
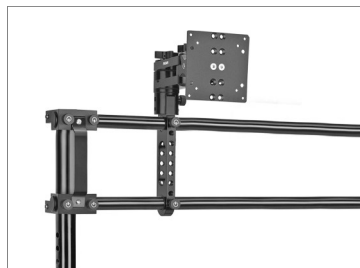


- To remove the VESA Mount, simply loosen the knob attached to it.



LCD Monitor Mounting on Sound Chief Cart

- Position the VESA Mount by aligning it with the threaded holes on the back of the LCD monitor, as shown in the image.

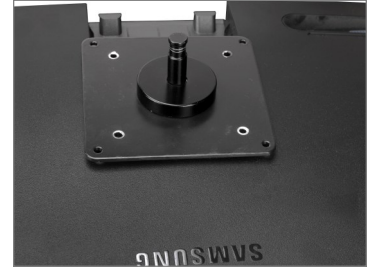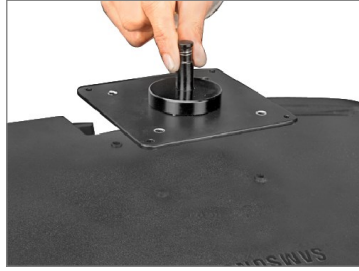

- Insert the bolts and tighten them securely using the 4mm Allen key.



- Mount the LCD monitor onto the VESA Mount and align it properly. Then, insert the bolts and tighten them firmly with the Allen key.



- Your Multi-Monitor VESA Mount System is now fully assembled and ready for use. You can mount two monitors onto your cart setup.



**YOUR PROAIM MULTI-MONITOR VESA MOUNT SYSTEM
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please contact us immediately and we promise our utmost support and care until you use our product.